

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B29C 43/38, 43/12, A47L 23/26	A1	(11) International Publication Number: WO 97/09159 (43) International Publication Date: 13 March 1997 (13.03.97)
(21) International Application Number: PCT/GB96/02105 (22) International Filing Date: 27 August 1996 (27.08.96) (30) Priority Data: 9517921.4 1 September 1995 (01.09.95) GB (71) Applicant (for all designated States except US): WALK OFF MATS LIMITED [GB/GB]; Cherrycourt Way, Leighton Buzzard, Bedfordshire LU7 8UH (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): HEDLEY, Terence, Michael [GB/GB]; 10 Overstone Close, Wing, Nr. Leighton Buzzard, Bedfordshire LU7 0TE (GB). (74) Agent: THOMAS, Roger, Tamlyn; D. Young & Co., 21 New Fetter Lane, London EC4A 1DA (GB).	(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: MAT MANUFACTURE

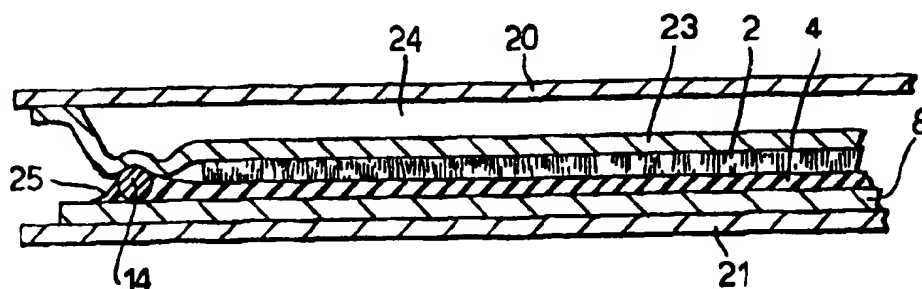

(57) Abstract

The invention provides a process for making a mat particularly a washable dust control mat, having a fabric layer (2) and a rubber backing layer (4) with a border (6) extending beyond the fabric layer (2) using a press which heat-cures the rubber and adheres it to the fabric and employs an inflatable bag (24) to apply pressure by pressing the layers against a heated platen (21), wherein a frame (14) defining the extent of the border (6) is located between the bag and the platen, and wherein the bag applies pressure to the assembled layers including the border portion of the backing layer. The frame (14) can act as a dam for preventing outward movement of the rubber and provide an

<i>FOR THE PURPOSES OF INFORMATION ONLY</i>			
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.			
AM	Armenia	GB	United Kingdom
AT	Austria	GE	Georgia
AU	Australia	GN	Guinea
BB	Barbados	GR	Greece
BE	Belgium	HU	Hungary
BF	Burkina Faso	IE	Ireland
BG	Bulgaria	IT	Italy
BJ	Benin	JP	Japan
BR	Brazil	KE	Kenya
BY	Belarus	KG	Kyrgyzstan
CA	Canada	KP	Democratic People's Republic of Korea
CF	Central African Republic	KR	Republic of Korea
CG	Congo	KZ	Kazakhstan
CH	Switzerland	LJ	Liechtenstein
CI	Côte d'Ivoire	LK	Sri Lanka
CM	Cameroon		
CROATIA		CYPRUS	
CUBA		CZECH REPUBLIC	
DENMARK		DEMOCRATIC REPUBLIC OF CONGO	
EE	Estonia	MD	Republic of Moldova
ES	Spain	MG	Madagascar
FI	Finland	ML	Mali
FR	France	MN	Mongolia
GA	Gabon	MR	Mauritania
		MW	Malawi
		MX	Mexico
		NE	Niger
		NL	Netherlands
		NO	Norway
		NZ	New Zealand
		PL	Poland
		PT	Portugal
		RO	Romania
		RU	Russian Federation
		SD	Sudan
		SE	Sweden
		SG	Singapore
		SI	Slovenia
		SK	Slovakia
		SN	Senegal
HUNGARY		ISRAEL	
INDONESIA		JAMAICA	
IRAN		JAPAN	
IRELAND		KENYA	
ITALY		KYRGYZSTAN	
JAMAICA		LAOS	
JAPAN		LIBERIA	
KENYA		LITHUANIA	
KYRGYZSTAN		LUIGI	
LAOS		MALAWI	
LIBERIA		MALAYSIA	
LITHUANIA		MALDIVES	
LUIGI		MALI	
MALAWI		MALTA	
MALAYSIA		MARIANA ISLANDS	
MALDIVES		MARSHALL ISLANDS	
MALI		MAURITANIA	
MALTA		MAURITIUS	
MARIANA ISLANDS		MEXICO	
MARSHALL ISLANDS		MOZAMBIQUE	
MAURITANIA		MYANMAR	
MAURITIUS		NAMIBIA	
MEXICO		NETHERLANDS	
MOZAMBIQUE		NEW ZEALAND	
MYANMAR		NICARAGUA	
NAMIBIA		NORWAY	
NETHERLANDS		OMAN	
NEW ZEALAND		PAKISTAN	
NICARAGUA		PANAMA	
NORWAY		PARAGUAY	
OMAN		PERU	
PAKISTAN		POLAND	
PANAMA		PORTUGAL	
PARAGUAY		ROMANIA	
PERU		RUSSIAN FEDERATION	
POLAND		RWANDA	
PORTUGAL		SAUDI ARABIA	
ROMANIA		SENEGAL	
RUSSIAN FEDERATION		SERBIA AND MONTENEGRO	
RWANDA		SLOVAKIA	
SAUDI ARABIA		SLOVENIA	
SENEGAL		SOUTH AFRICA	
SERBIA AND MONTENEGRO		SPAIN	
SLOVAKIA		SRI LANKA	
SLOVENIA		SWEDEN	

<i>FOR THE PURPOSES OF INFORMATION ONLY</i>			
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.			
AM	Armenia	GB	United Kingdom
AT	Austria	GE	Georgia
AU	Australia	GN	Guinea
BB	Barbados	GR	Greece
BE	Belgium	HU	Hungary
BF	Burkina Faso	IE	Ireland
BG	Bulgaria	IT	Italy
BJ	Benin	JP	Japan
BR	Brazil	KE	Kenya
BY	Belarus	KG	Kyrgyzstan
CA	Canada	KP	Democratic People's Republic of Korea
CF	Central African Republic	KR	Republic of Korea
CG	Congo	KZ	Kazakhstan
CH	Switzerland	LJ	Liechtenstein
CI	Côte d'Ivoire	LK	Sri Lanka
CM	Cameroon		
CROATIA		CYPRUS	
CUBA		CZECH REPUBLIC	
DENMARK		DEMOCRATIC REPUBLIC OF CONGO	
EE	Estonia	MD	Republic of Moldova
ES	Spain	MG	Madagascar
FI	Finland	ML	Mali
FR	France	MN	Mongolia
GA	Gabon	MR	Mauritania
		MW	Malawi
		MX	Mexico
		NE	Niger
		NL	Netherlands
		NO	Norway
		NZ	New Zealand
		PL	Poland
		PT	Portugal
		RO	Romania
		RU	Russian Federation
		SD	Sudan
		SE	Sweden
		SG	Singapore
		SI	Slovenia
		SK	Slovakia
		SN	Senegal
HUNGARY		ISRAEL	
INDONESIA		JAMAICA	
IRAN		JAPAN	
IRELAND		KENYA	
ITALY		KYRGYZSTAN	
JAMAICA		LAOS	
JAPAN		LIBERIA	
KENYA		LITHUANIA	
KYRGYZSTAN		LUSEMBURG	
LAOS		MALAWI	
LIBERIA		MALAYSIA	
LITHUANIA		MALDIVES	
LUSEMBURG		MALI	
MALAWI		MALTA	
MALAYSIA		MANGOLIA	
MALDIVES		MARSHALL ISLANDS	
MALI		MAURITANIA	
MALTA		MEXICO	
MANGOLIA		MOLODOVA	
MARSHALL ISLANDS		MONACO	
MAURITANIA		MOROCCO	
MEXICO		MYANMAR	
MOLODOVA		NETHERLANDS	
MONACO		NEW ZEALAND	
MOROCCO		NICARAGUA	
MYANMAR		NORWAY	
NETHERLANDS		OMAN	
NEW ZEALAND		PAKISTAN	
NICARAGUA		PANAMA	
NORWAY		PARAGUAY	
OMAN		PERU	
PAKISTAN		POLAND	
PANAMA		PORTUGAL	
PARAGUAY		ROMANIA	
PERU		RUSSIAN FEDERATION	
POLAND		RWANDA	
PORTUGAL		SAUDI ARABIA	
ROMANIA		SENEGAL	
RUSSIAN FEDERATION		SERBIA AND MONTENEGRO	
RWANDA		SINGAPORE	
SAUDI ARABIA		SLOVAKIA	
SENEGAL		SLOVENIA	
SERBIA AND MONTENEGRO		SOUTH AFRICA	
SINGAPORE		SPAIN	
SLOVAKIA		SWEDEN	

<i>FOR THE PURPOSES OF INFORMATION ONLY</i>			
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.			
AM	Armenia	GB	United Kingdom
AT	Austria	GE	Georgia
AU	Australia	GN	Guinea
BB	Barbados	GR	Greece
BE	Belgium	HU	Hungary
BF	Burkina Faso	IE	Ireland
BG	Bulgaria	IT	Italy
BJ	Benin	JP	Japan
BR	Brazil	KE	Kenya
BY	Belarus	KG	Kyrgyzstan
CA	Canada	KP	Democratic People's Republic of Korea
CF	Central African Republic	KR	Republic of Korea
CG	Congo	KZ	Kazakhstan
CH	Switzerland	LJ	Liechtenstein
CI	Côte d'Ivoire	LK	Sri Lanka
CM	Cameroon		
CROATIA		CYPRUS	
CUBA		CZECH REPUBLIC	
DK	Denmark	DE	Germany
EE	Estonia	EC	Ecuador
ES	Spain	EG	Egypt
FI	Finland	EL	Greece
FR	France	EN	England
GA	Gabon	ET	Ethiopia
		EU	European Union
		FA	Falkland Islands
		FE	Federated States of Micronesia
		FG	Fiji
		GH	Ghana
		GI	Gibraltar
		GL	Greenland
		GM	Gambia
		GN	Guinea
		GP	Guadeloupe
		GQ	Equatorial Guinea
		GR	Greece
		GU	Guam
		GW	Guinea-Bissau
		GY	Guyana
		HA	Haiti
		HE	Hong Kong
		HN	Honduras
		HR	Croatia
		HT	Haiti
		HU	Hungary
		ID	Indonesia
		IL	Israel
		IM	Isle of Man
		IN	India
		IO	British Indian Ocean Territory
		IQ	Iraq
		IR	Iran
		IS	Iceland
		IT	Italy
		JM	Jamaica
		JO	Jordan
		JP	Japan
		KE	Kenya
		KH	Kampuchea
		KI	Kiribati
		KM	Comoros
		KN	St Kitts and Nevis
		KO	Korea
		KP	North Korea
		KR	South Korea
		KW	Kuwait
		KY	Cayman Islands
		KZ	Kazakhstan
		LA	Laos
		LB	Lebanon
		LC	St Lucia
		LI	Liechtenstein
		LK	Sri Lanka
		LR	Liberia
		LS	Lesotho
		LT	Lithuania
		LU	Luxembourg
		LV	Latvia
		LY	Libya
		MA	Morocco
		MC	Monaco
		MD	Republic of Moldova
		ME	Montenegro
		MG	Madagascar
		MH	Marshall Islands
		MI	Maldives
		ML	Mali
		MM	Myanmar
		MN	Mongolia
		MO	Macao
		MP	Northern Mariana Islands
		MR	Mauritania
		MS	Montserrat
		MT	Malta
		MU	Mauritius
		MV	Maldives
		MW	Malawi
		MX	Mexico
		MY	Malaysia
		NE	Niger
		NL	Netherlands
		NO	Norway
		NZ	New Zealand
		PL	Poland
		PT	Portugal
		RO	Romania
		RU	Russian Federation
		SD	Sudan
		SE	Sweden
		SG	Singapore
		SI	Slovenia
		SK	Slovakia
		SN	Senegal
		SO	Somalia
		SR	Suriname
		SS	South Sudan
		ST	St Helena
		SV	El Salvador
		SW	Swaziland
		SY	Syria
		TB	Taiwan
		TD	Chad
		TE	Togo
		TF	French Southern Territories
		TH	Thailand
		TJ	Tajikistan
		TK	Tokelau
		TL	Timor-Leste
		TM	Turkmenistan
		TN	Tunisia
		TO	Tonga
		TR	Turkey
		TT	Trinidad and Tobago
		UA	Ukraine
		UG	Uganda
		US	United States of America
		UZ	Uzbekistan
		VN	Viet Nam

MAT MANUFACTURE

This invention relates to the manufacture of mats, rugs and carpets, particularly mats, rugs and carpets where a rubber (natural or synthetic) backing sheet is cured and heat-bonded under pressure to the back of a fabric layer leaving a rubber border extending beyond the fabric layer. It also relates to mats, rugs and carpets as such and to apparatus for use in producing them.

The invention is of particular utility in the manufacture of washable mats, rugs and carpets such as dust-control mats. The term "washable" means washable by immersion and agitation in water or other cleaning fluid usually followed by spin extraction and tumble drying. The term "mat" is used hereinafter in a wide sense to include rugs and carpets.

Dust control mats have conventionally been made by first laying down an uncured sheet of rubber, placing a mat fabric layer on top of it leaving the required border (e.g. 2 cm), and placing the assembly of the two layers in a heated press which cures the rubber and bonds it to the fabric. The layers are conveniently assembled on a horizontally movable carrier which can be moved into and out of the press on rollers, the carrier having an upper layer of flexible material secured around its edges to form an inflatable bag. Once in the press the carrier can be raised with hydraulic or pneumatic rams beyond a point where support blocks can be moved horizontally beneath the carrier (so that the rams do not sustain the pressing force). The bag is then inflated to press the mat assembly against a heated platen disposed above it and heated to say 170°C by pressurised steam in conduits in the platen. The advantage of applying pressure using a bag is that a bag conforms to the contour of the mat assembly and applies an even pressure. After curing the pressurised air in the bag is released and the bag evacuated by applying suction or using the hydraulic or pneumatic rams to squeeze the air out. The support blocks are removed and the rams lower the carrier so that it can be removed from the press.

- 2 -

to apply the heat from the fabric side so as to ensure proper bonding of the two layers so that they do not separate in use. However it is possible to reverse the arrangement so that heat is applied to the rubber side and/or the fabric layer is beneath the rubber layer. Also, if the range of movement of the bag surface is sufficient, it is possible to omit the rams and the blocks because the assembly is sufficiently close to the heated platen when it enters the press.

It is conventional to provide release sheets of non-stick material such as polytetrafluoroethylene or silicone materials between the fabric layer and the platen and between the bag and the rubber. It is also conventional to provide a light aluminum (or other metal) moulding sheet in contact with the rubber, the moulding sheet having holes or depressions which mould projections (cleats) or patterns (e.g. logos) into the rubber. Silicone rubber moulding sheets can also be used.

The rubber flows outwardly during pressing to form edges which taper down to a very small thinness. These edges are prone to tearing and extend by unpredictable distances. Hence it is necessary in practice to trim the cured backing sheet with guillotines or knives. Finally it is conventional to provide small openings in the rubber backing to allow passage of water during laundering, particularly during spin extraction. This can be achieved by running the mats between a spiked roller and a backing roller having grooves aligned with the spikes.

The three steps of (a) assembling the layers and operating the press, (b) trimming the edges of the backing, and (c) piercing the backing, are labour-intensive and we have sought ways of improving the efficiency of the overall process.

According to the invention, we provide a process for making a mat (preferably a dust control mat) having a fabric layer and a rubber backing layer using a press which heat-cures the rubber and adheres it to the fabric and employs an inflatable bag to apply pressure by pressing the layers against a heated platen.

the bag and the platen and wherein the bag applies pressure over substantially the

- 3 -

whole area of the backing layer.

According to a preferred embodiment of the invention, we provide a process for making a mat (preferably a dust control mat) having a fabric layer and a rubber backing layer with a border extending beyond the fabric layer using a press which heat-cures the rubber and adheres it to the fabric and employs an inflatable bag to apply pressure by pressing the layers against a heated platen, wherein a frame defining the extent of the border is located between the bag and the platen, and wherein the bag applies pressure to the assembled layers including the border portion of the backing layer. A border beyond the fabric layer is normally provided but the invention is operable without any border or with a very small border e.g. 1-2 mm wide if the frame cannot cut through the fabric layer; for convenience only, the following description refers to mats with borders.

Preferably, rubber accumulates in the areas immediately inward of the frame while it is still flowable such that a thickened reinforcement is provided in these areas of the cured backing layer. Thus, according to another aspect of the invention, we provide a mat in which a rubber backing sheet has an integral thickened peripheral region.

Preferably the bag applies pressure to the fabric side of the assembled layers although the alternative arrangement where it applies pressure to the backing side can be used.

The press may take a number of forms e.g. as described in US Patent 4,447,201 to Knudsen, the contents of which are incorporated herein by reference. This patent describes the more common movable frame type of press. However, fixed frame presses such as that described in EP-A-367441 may be used. A number of presses suitable for making dust control mats are commercially available from Shaw-Almex USA Inc. of 3529-H Church Street, Clarkston, Georgia 30021, USA.

The frame is normally of metal and in one preferred arrangement, can for

(e.g. adhered to or welded to) the moulding sheet referred to above.

- 4 -

according to a further aspect of the invention, we provide a moulding sheet for use in making mats by heat-compression moulding an assembly of a rubber backing layer and a fabric layer, the sheet comprising or being associated with a frame defining the mat periphery.

The frame can be greater or smaller in area than the initial area of the backing layer. If it is greater in area than the initial area of the backing layer it acts as a dam; if it is smaller it acts both as a guillotine and a dam. The latter arrangement is preferred in which case the frame needs to have a cross-section which is narrow at the top or bottom to provide a cutting action.

In order that the operator can ensure that the border is in the correct position, another preferred arrangement is for the fabric layer and for the frame (which in this case is separate from the moulding sheet) to be both placed on top of the backing layer such that in the press the bag bears down on both the fabric layer and the frame, the latter being forced downwardly through the backing layer.

It is preferred to make the frame of metal rod, particularly of circular section with the section diameter being preferably about twice the backing layer thickness in the central part of the finished mat. If the diameter (height) is too small, the thickened rubber layer in the border may be too thin; if it is too great, the inherent stiffness of the bag material may prevent adequate compression in the angle between the frame and the top of the backing layer. A circular section rod may provide a concave end to the border but this has been found not to be a disadvantage. A circular section rod of appropriate diameter is sharp enough to be pushed through the rubber, during initial operation of the press, while being blunt enough to avoid damage to the bag.

Normally the finished mat will be rectangular and a rectangular frame will be used. However, other shapes such as circular or rectangular with rounded corners can be used. Also, the sides of the frame will not necessarily be joined together but this will normally be the case so that unwanted movement during

the mat periphery, e.g. one or more sides of the frame may be omitted.

- 5 -

It will be seen that the process described eliminates a subsequent trimming operation since any excess rubber outside the frame can be peeled away after pressing. It is also possible, according to a preferred feature of the invention, to simultaneously pierce the backing to provide the small holes described above. This can be achieved for example by providing spikes on the moulding sheet referred to above. The spikes need not necessarily pass completely through the backing since a thin membrane at the end of the hole which they provide will be broken during subsequent use of the mat. The moulding sheet may be shaped to provide dish-like depressions around the holes as described in our GB patent application GB-A-2275869.

As mentioned above, a further advantage of the invention arises from accumulation of rubber in the border area where the maximum strength of the backing layer is required. This means that the thickness over the main area of the mat can be reduced e.g. from 2 mm to 1 mm because the accumulation in the border area can double the thickness. This of course means that the amount of rubber used is substantially reduced. Also the use of a frame reduces wastage simply because there is no longer a substantial tapered peripheral area of backing layer which has to be trimmed off to achieve the desired edge thickness.

Instead of using a greater overall thickness to achieve the required border thickness, some previous mats have a reinforced border made by heat fusing an extra layer of rubber thereto. This is labour-intensive and can lead to rippling due to differential shrinkage of the two rubbers during laundering. The present invention can be used to overcome these disadvantages.

Preferred embodiments of the invention will now be described in more detail, reference being made to the drawings in which:-

Fig. 1 is a vertical section through a dust control mat made according to the invention;

Fig. 2 is a vertical section through part of a moulding sheet to which a

- 6 -

(omitting the projections);

Fig. 4 is a more diagrammatic sectional view of an edge of a mat showing the positions of the dimensions given in the Table below; and

Fig. 5 is a diagrammatic vertical section of a mat-making press of the type which can be used in the process of the invention.

The mat shown in Fig. 1 has a pile fabric 2 and a rubber backing 4 with a thicker border 6 extending beyond the fabric 2. The moulding sheet 8 shown in Fig. 2 and Fig. 3 is basically of a conventional type with projections 10 which form indentations in the backing 4 and thus provide cleats or a pattern or logo, but additionally having spikes 12 for perforating the backing 4 and a frame 14 of generally rectangular shape but with rounded corners. The frame 14 in this case is a complete uninterrupted frame and is made of circular section metal (i.e. steel) rod and is secured to the sheet 8 (e.g. by welding). In another embodiment, the sheet 8 has perforations for forming the cleats (instead of projections 10). If it is desirable that cleats are not formed in certain areas, e.g. adjacent the edge of the mat, the relevant perforations may be blanked off with an adhesive backed PTFE coated woven glass fabric.

The fabric layer can be of a tufted pile, cut, looped or both, and is typically of cut pile. The pile is generally of synthetic fibre such as polyamide, polyester or polypropylene or of natural fibre such as cotton or viscose. With a tufted pile a typical weight is of between 300 and 1200 gms/m² particularly 640 gms/m²; in one preferred example we use Polyamide (Nylon 6) with a tufted pile weight of 640 gms/m². The pile can be tufted onto a woven or non-woven substrate (primary backing) e.g. of polyester or polypropylene of density between 70 and 300 gms/m². In the preferred example we use a non-woven polyester primary backing of density 100 gms/m².

Dependent on mat size and width of border required the fabric size will vary but for a typical mat with 2 cms borders the fabric would be 3 cms smaller

than the mat size. This is because of shrinkage of around 1

- 7 -

which will reduce the 117 to 116 cms. As discussed above the border can be virtually non-existent but this is not preferred.

Although a wide variety of natural or synthetic rubbers can be used, the backing layer is preferably a nitrile (Acrylonitrile Butadiene Rubber) or SBR (Styrene Butadiene Rubber) or blend thereof, of hardness between 35 and 75 IRHD and thickness of between 0.5 and 3 mm. In the preferred example a 100% nitrile rubber of hardness 60 IRHD and thickness of 1.01 mm is used.

The frame size may for example be 1 cm in all directions larger than the finished mat. For example to produce a 120 x 80 cms mat will require a frame with dimensions 121 x 81 cms. This is to allow for shrinkage (again around 1%) of the mat on cooling after vulcanisation.

The initial and final thickness are dependent on the cross-sectional diameter of the frame members and pressure used during manufacture of the mat. Referring to Fig. 4 of the drawings, the following dimensions are typical:

Rubber Thickness	Frame Diameter	Backing Pressure	Thickness at A	Thickness at B	Thickness at C
1.52 mm	3 mm	30 psi	1.72 mm	1.71 mm	1.58 mm
1.52 mm	3 mm	40 psi	2.38 mm	1.67 mm	1.57 mm
1.52 mm	3 mm	50 psi	2.44 mm	1.79 mm	1.55 mm
1.01 mm	2 mm	30 psi	1.39 mm	1.19 mm	1.03 mm
1.01 mm	2 mm	50 psi	1.53 mm	1.19 mm	1.07 mm

In the preferred example we use 1.01 mm thickness rubber at 30 psi with a 2 mm diameter frame members to produce the results above.

Again in the preferred example we use the bag on top, platen beneath method (with the fabric layer on top of the backing layer which facilitates accurate placing of the fabric layer).

An arrangement with the bag below (adjacent the backing layer) and the platen above can be used but in such a case the moulding sheet for the backing

the border due to the greater thickness of the main part of the mat. In such a case

- 8 -

a flexible moulding sheet e.g. of silicone rubber could be used to produce the cleats and openings referred to above.

At 170°C for example cure times could vary between 3 and 25 minutes dependent on rubber formulation and whether the platen is above or below. In the preferred example with the platen below and using 1.01 mm thick rubber the cure time was 5 minutes. It may be desirable to reduce the temperature or modify the rubber formulation to give an increased cure time. This will give a longer flow time which will improve the cross-section of the border and give better tuft anchorage as well as permitting a reduction in pressure.

A typical moulding sheet is of 1.6 mm thick aluminium sheet with 2 mm diameter holes on a 5 mm square pitch. The spikes may for example be in rows 10 cms apart with 5 cms between rows and with spikes in the next row on a staggered pitch.

Generally the vacuum generated by a domestic vacuum cleaner is sufficient for evacuating the air bag; this is around 75 inches of water.

The temperature of the platen may for example be 165-175°C (constant), 170°C being preferred. The preferred pressure is 30 psi.

The frame will normally be below the backing sheet and permanently fixed e.g. by welding to the base plate (or release sheet) to ensure squareness. As indicated above it is preferably of circular section metal rod welded to form the desired mat shape e.g. rectangular.

Referring now to Fig. 5, there is shown diagrammatically and not to scale, a peripheral part of a press of the general type disclosed in US Patent 4,447,201 together with a mat and frame arrangement according to the present invention. The press has an upper frame member 20 which may or may not be movable towards and away from a heated platen 21 for loading and unloading. Secured by its edges to the upper frame member 20 is a flexible diaphragm 23 which, together with the frame member 20 forms an air bag 24. Air can be supplied under

pressure to the air bag 24 and be exhausted by a vacuum arrangement to raise the diaphragm 23 and thus

- 9 -

backing 6, the pile fabric 2 and the base plate 8 and frame 14 are as shown in Figs. 1-3, except that the provision for forming cleats etc. is omitted for simplicity. As shown the pressing operation is completed and the frame 14 has cut off a peripheral part of the backing shown at 25.

Example

A dust control mat as shown in Fig. 1 has a backing layer of cured 100% nitrile rubber of hardness 60 IRHD, thickness 1.01 mm (over the main part of its area), and overall dimensions 120 x 80 cm. Bonded thereto is a fabric layer of dimensions 116 x 76 cm leaving a 2 cm peripheral border. The fabric layer comprises a tufted pile of Nylon 6 with a tufted pile weight of 640 gms/m² tufted onto a non-woven polyester substrate of density 100 gms/m². The mat is made as follows.

The layers are assembled with the fabric layer on top and heat- and pressure-cured in a press with heated platen beneath and an air bag on top e.g. as described and shown in Fig. 1 of US Patent 4,447,201. The layers are carried on a moulding sheet of 1.6 mm thick aluminium which can be rolled into and out of the press on rollers. When in the press, it is located over the heated platen such that heat can readily pass through it when the pressure is applied by the air bag. The moulding sheet is as shown in Figs. 2 and 3 (but with a separate frame) and has 2 mm diameter holes on a 5 mm square pitch to provide projections (cleats) in the backing in the usual way. Spikes are provided in rows 10 cm apart with 5 cm between rows and spikes in adjacent rows being on a staggered pitch. These spikes provide holes in the backing layer to facilitate laundering. The frame is a 121 x 81 cm rectangular frame made up of 2 mm diameter steel rod and in this case is hand-positioned on top of the backing layer border before entry into the press. Release sheets of conventional type are provided as described above. The air bag is inflated at 30 psi for 5 minutes and then evacuated, the temperature of the platen being maintained at a constant 170°C. The cured mat is then withdrawn

from the press.

The initial size of the backing layer is approximately 121 x 81 cms such that

- 10 -

the frame acts as a guillotine as well as a dam. The excess rubber beyond the frame can be peeled away prior to the next cycle and a mat with a thickened border is obtained as indicated in the above table.

- 11 -

CLAIMS

1. A process for making a mat having a fabric layer and a rubber backing layer using a press which heat-cures the rubber and adheres it to the fabric and employs an inflatable bag to apply pressure by pressing the layers against a heated platen, wherein a frame defining the extent of the periphery of the mat is located between the bag and the platen and wherein the bag applies pressure over substantially the whole area of the backing layer.
2. A process for making a mat having a fabric layer and a rubber backing layer with a border extending beyond the fabric layer using a press which heat-cures the rubber and adheres it to the fabric and employs an inflatable bag to apply pressure by pressing the layers against a heated platen, wherein a frame defining the extent of the border is located between the bag and the platen, and wherein the bag applies pressure to the assembled layers including the border portion of the backing layer.
3. A process according to claim 1 or 2 wherein the mat is a dust control mat.
4. A process according to claim 3 wherein the mat is washable.
5. A process according to any preceding claim wherein the bag applies pressure to the fabric side of the mat and the platen supplies heat to the backing side of the mat.
6. A process according to any preceding claim wherein the fabric layer is on top of the backing layer during pressing.

- 12 -

7. A process according to claim 6 wherein the frame is placed on top of a border portion of the backing layer before pressing and it cuts through the backing layer during pressing.

8. A process according to any one of claims 1-6 wherein the frame is on the side of the backing layer opposite to the fabric layer.

9. A process according to claim 8 wherein the frame is supported by a moulding sheet for forming cleats or patterns in the backing layer.

10. A process according to claim 9 wherein the frame is secured to or integral with the moulding sheet.

11. A process according to claim 9 or 10 wherein the moulding sheet is of metal.

12. A process according to claim 9, 10 or 11 wherein the moulding sheet has spikes to provide holes in the backing layer.

13. A process according to claim 8, 9, 10, 11 or 12 wherein the frame cuts through the backing layer during pressing.

14. A process according to any preceding claim wherein the frame is substantially uninterrupted.

15. A process according to any preceding claim wherein the frame is substantially rectangular.

corners.

- 13 -

17. A process according to any preceding claim wherein the frame is formed from circular section metal rod.

18. A process according to any preceding claim, wherein the backing layer flows outwardly during pressing and the frame acts as a dam so that the backing layer in the finished mat has an integral thickened peripheral portion.

19. A process according to claim 1 substantially as described with reference to the drawings.

20. A process according to claim 1 substantially as described in the Example.

21. A mat having a fabric layer and a rubber backing layer bonded together in which the rubber backing has an integral thickened peripheral region beyond the fabric layer, when produced by a process according to any preceding claim.

22. A mat according to claim 21 which has holes in the backing layer.

23. A mat according to claim 21 substantially as hereinbefore described.

24. A moulding sheet for use in making mats by heat-compression moulding an assembly of a rubber backing layer and a fabric layer, the sheet comprising or being associated with a frame defining the mat periphery.

25. A moulding sheet according to claim 24 wherein the moulding sheet is such as to form cleats in the backing layer and, in operation, supports the frame.

- 14 -

26. A moulding sheet according to claim 24 or 25 wherein the frame is secured to or integral with the moulding sheet.

27. A moulding sheet according to claim 24, 25 or 26 wherein the moulding sheet is of metal.

28. A moulding sheet according to any one of claims 24-27 wherein the moulding sheet has spikes to provide holes in the backing layer.

29. A moulding sheet according to any one of claims 24-27 wherein the frame is substantially uninterrupted.

30. A moulding sheet according to any one of claims 24-29 wherein the frame is substantially rectangular.

31. A moulding sheet according to any one of claims 24-30 wherein the frame has rounded corners.

32. A moulding sheet according to any one of claims 24-31 wherein the frame is formed from circular section metal rod.

33. A moulding sheet according to claim 24 substantially as described with reference to the drawings.

1/1

Fig.1.

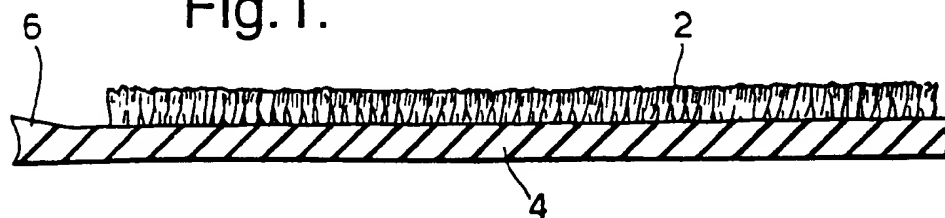


Fig.2.

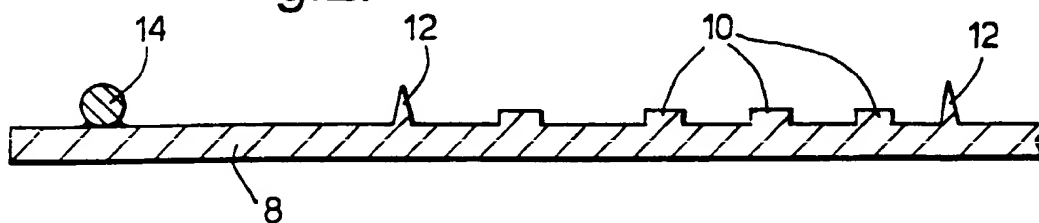


Fig.3.

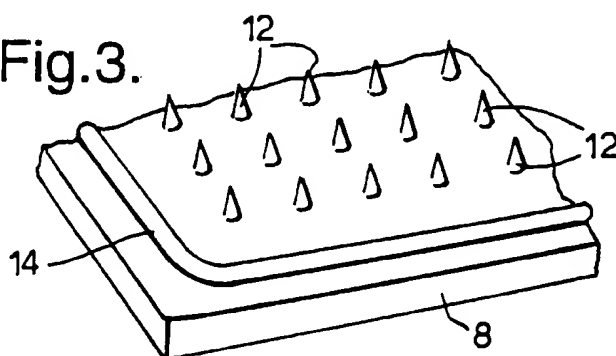


Fig.4.





Fig.5.

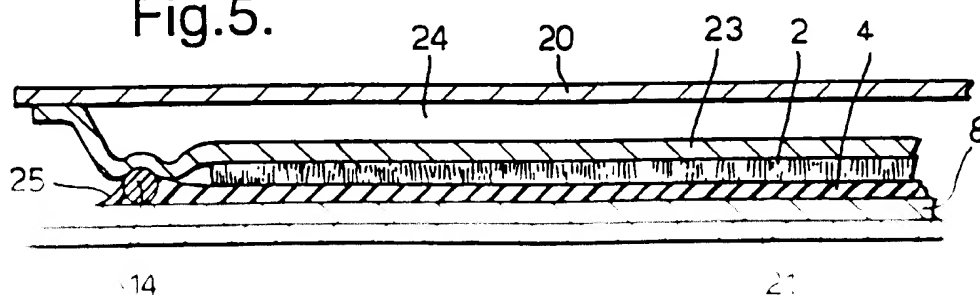

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/GB 96/02105

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B29C43/38 B29C43/12 A47L23/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US,A,3 382 125 (LOWDERMILK ALFRED J JR) 7 May 1968 see column 1, line 62 - column 3, line 25 see figure 2 ---	1-6,8, 14-16, 19-24, 29-31,33
A	EP,A,0 513 449 (DUSKIN COMPANY LIMITED) 19 November 1992 see page 1, line 22 - line 30 see page 4, line 4 - line 7 see figure 5 ---	1,2,21
A	EP,A,0 007 321 (GARABEDIAN ARMEN) 6 February 1980 see page 13, line 1 - page 14, line 27 --- -/--	1,2

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

28 November 1996

02.12.96

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Lanaspeze, J

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 96/02105

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP,A,0 351 041 (MILLIKEN RES CORP) 17 January 1990 see column 1, line 40 - column 2, line 43 see figures ---	1,2,9,21
A	US,A,5 061 430 (LANG AAGE) 29 October 1991 see abstract; figure 2 ---	1,2
A	GB,A,2 275 869 (WALK OFF MATS LTD) 14 September 1994 cited in the application see abstract; figures -----	21-23

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 96/02105

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3382125	07-05-68	NONE	
EP-A-0513449	19-11-92	US-A- 5305565	26-04-94
EP-A-0007321	06-02-80	NONE	
EP-A-0351041	17-01-90	CA-A- 1335649	23-05-95
		DE-D- 68910027	25-11-93
		DE-T- 68910027	31-03-94
		ES-T- 2044109	01-01-94
		JP-A- 5245098	24-09-93
		JP-A- 2167109	27-06-90
		US-A- 4886692	12-12-89
		US-A- 4902465	20-02-90
US-A-5061430	29-10-91	DK-B- 168367	21-03-94
		JP-A- 2026711	29-01-90
GB-A-2275869	14-09-94	NONE	